



APATL0000710

IPS Alpha Technology, Ltd.


Date: Oct.20, 2009

For Messrs. Panasonic Corporation Group
CUSTOMER'S ACCEPTANCE SPECIFICATIONS**Part Number: AX080B052E**
Panasonic Global Code: L5EDD8Q00057
Panasonic Issue Number: L20080576CONTENTS

No.	Item	Sheet No.	Page
-	COVER	IPS4PS 2601-AX080B052E -5	1-1/2~2/2
-	RECORD OF REVISION	IPS4PS 2602-AX080B052E -5	2-1/1
-	DESCRIPTION	IPS4PS 2603-AX080B052E -5	3-1/1
1	ABSOLUTE MAXIMUM RATINGS	IPS4PS 2604-AX080B052E -5	4-1/2~2/2
2	INITIAL OPTICAL CHARACTERISTICS	IPS4PS 2605-AX080B052E -5	5-1/2~2/2
3	ELECTRICAL CHARACTERISTICS	IPS4PS 2606-AX080B052E -5	6-1/1
4	BLOCK DIAGRAM	IPS4PS 2607-AX080B052E -5	7-1/1
5	INTERFACE PIN ASSIGNMENT	IPS4PS 2608-AX080B052E -5	8-1/5~5/5
6	INTERFACE TIMING	IPS4PS 2609-AX080B052E -5	9-1/3~3/3
7	DIMENSIONAL OUTLINE	IPS4PS 2610-AX080B052E -5	10-1/2~2/2
8	LABEL FORMAT	IPS4PS 2611-AX080B052E -5	11-1/3~3/3
9	COSMETIC SPECIFICATIONS	IPS4PS 2612-AX080B052E -5	12-1/2~2/2
10	PRECAUTION	IPS4PS 2613-AX080B052E -5	13-1/3~3/3
11	PACKING	IPS4PS 2614-AX080B052E -5	14-1/2~2/2
12	RELIABILITY TEST	IPS4PS 2615-AX080B052E -5	15-1/1

Please return 1 copy with your signature on this page for approval.

Accepted by: _____

Proposed by: 

Date: _____

IPS Alpha
Technology,Ltd.Sheet
No.

IPS4PS 2601 – AX080B052E – 5

Page

1-1/2

Panasonic Corporation GroupChecklist of the items in the panasonic standard delivery specifications

Please check if the delivery specifications include the following items.

(If a listed item is not includes, please make sure to describe the reason why it has not been included.)

Ver1.1

No.	Item description	Listing check			Reason for not including (Ex: Under research, confidential)
1	Part No. reference table (The global part No. and manufacturer part No. must be listed for series part numbers)	☐ Yes	☐ No	☒ N/A	
2	Part number structure (List the type, constant, class stc for a series part No.)	☐ Yes	☐ No	☒ N/A	
3	Place of production, factory name, country of origin	☒ Yes	☐ No	☐ N/A	
4	Electrical characteristics (Measuring circuit, measurement condition, dielectric strength, surge voltage, insulation resistance, rates capacity etc.)	☒ Yes	☐ No	☐ N/A	
5	Mechanical characteristics (Test method, terminal strength, tensile strength, anti-vibration, solder heat resistance, ease of soldering etc.)	☒ Yes	☐ No	☐ N/A	
6	External shape/dimensions (External shape drawing, simions with tolerance)	☒ Yes	☐ No	☐ N/A	
7	Structure/material (Construction, material)	☐ Yes	☒ No	☐ N/A	
8	Functions (Semiconductor parts must include the functions)	☒ Yes	☐ No	☐ N/A	
9	Microcomputer performance (Microcomputer products must include the CPU bus width (bit))	☐ Yes	☐ No	☒ N/A	
10	Recommended circuit diagrams (Semiconductor parts must include a recommended circuit)	☐ Yes	☐ No	☒ N/A	
11	Pattern diagrams of PCB (Semiconductor parts must include the PCB patterns)	☐ Yes	☐ No	☒ N/A	
12	Environmental reliability warranty items (Anti-humidity, high/low temperature, thermal shock, life etc.)	☒ Yes	☐ No	☐ N/A	
13	Operating temperature range	☒ Yes	☐ No	☐ N/A	
14	Storage temperature range	☒ Yes	☐ No	☐ N/A	
15	Packaging specification (Simple package structure illustration, taping dimensions, stick dimensions, packaged quantity etc.)	☒ Yes	☐ No	☐ N/A	
16	Marking indication method	☐ Yes	☒ No	☐ N/A	
17	Strage period after opening (Semiconductor parts must include the storage environment and storage period after opening)	☐ Yes	☒ No	☐ N/A	
18	Precautions for use	☒ Yes	☐ No	☐ N/A	
19	Temperature profile (Solder flow and reflow temperature profile)	☐ Yes	☐ No	☒ N/A	
20	Failure rate (Exclude if it cannot be determined due to purchased item)	☐ Yes	☒ No	☐ N/A	
21	Safty standards (Conforming standard information, UL/CSA, electricity safety law, PL law etc.)	☐ Yes	☒ No	☐ N/A	
22	Process control chart	☐ Yes	☒ No	☐ N/A	
23	Export control checklist (Survey checklist against the export control law)	☐ Yes	☒ No	☐ N/A	
24	Items subject to advance discussions (Verify the statement that all changes to delivery specifications shall be notified in advance)	☒ Yes	☐ No	☐ N/A	
25	Manufacture's evaluation test data	☐ Yes	☒ No	☐ N/A	
26	Other materials determined necessary by the business unit	☐ Yes	☒ No	☐ N/A	

Disclosure/Non-disclosure (NDA, blanket contract, etc.)	☒ Disclosure	☐ Non-disclosure	
Description of intellectual property right	☒ No	☐ Yes	

**RECORD OF REVISION**

Date	The upper section : Previous revision The lower section : New revision		Summary
	Sheet No.	Page	
Jan.23,2009	IPS4PS 2611-AX080B052E-1	11-2/2	Added Rev.B Changed Optical Sheet
	IPS4PS 2611-AX080B052E-2	11-2/2	
May.14,2009	IPS4PS 2603-AX080B052E-2	3-1/1	Added Factory for IPS Alpha Technology, Ltd.(Mobara/Utsunomiya,Japan)
	IPS4PS 2603-AX080B052E-3	3-1/1	
	IPS4PS 2611-AX080B052E-2	11-1/2	Added Factory U : IPS Alpha Technology, Ltd.(Utsunomiya) Added Special mark Added Glass Maker B
	IPS4PS 2611-AX080B052E-3	11-1/3	
	IPS4PS 2611-AX080B052E-2	11-2/2	Added Rev.C,D,E,F,G,H,J,K,L Changed Optical Sheet and Tcon107
	IPS4PS 2611-AX080B052E-3	11-2/3	
	IPS4PS 2611-AX080B052E-2	—	Added samples of the product labels by production bases.
	IPS4PS 2611-AX080B052E-3	11-3/3	
Aug.21,2009	IPS4PS 2611-AX080B052E-3	11-2/3	Added Rev.M,N,P,Q,R,S,T,U,V,W,X : Changed Backlight and EEFL
	IPS4PS 2611-AX080B052E-4	11-2/3	
Oct.20,2009	IPS4PS 2611-AX080B052E-4	11-2/3	Added Rev.Y,Z : Added METCO Backlight ass'y.
	IPS4PS 2611-AX080B052E-5	11-2/3	

**DESCRIPTION**

The following specifications are applied to the following IPS-Pro-TFT LCD module.

Note : Inverter for backlight unit is not built in this module.

Product Name : AX080B052E

Product Factory : IPS Alpha Technology, Ltd. (Mobara/Utsunomiya,Japan)

General Specifications


Effective display area	: (H) 697.685 × (V) 392.256	(mm)
Number of pixels	: (H) 1,366 × (V) 768	(pixels)
Pixel pitch	: (H) 0.51075 × (V) 0.51075	(mm)
Color pixel arrangement	: R+G+B vertical stripe	
Display mode	: Transmissive mode Normally black mode	
Top polarizer type	: Semi-Glare	
Number of colors	: 16,777,216	(colors)
Viewing angle range	: Super wide version (Horizontal & vertical : 178°, CR ≥ 10)	
Input signal	: 1-channel LVDS (LVDS : Low voltage differential signaling)	
Backlight	: 14 pcs. of EEFL (EEFL : External electrode fluorescent lamp)	
External dimensions	: Typ. (H) 760.0 × (V) 450.0 × (t) (43.0)	(mm)
Weight	: Typ. 7,000	(g)

1. ABSOLUTE MAXIMUM RATINGS

1.1 Environmental Absolute Maximum Ratings

ITEM	Operating		Storage		UNIT	NOTE
	Min.	Max.	Min.	Max.		
Temperature	0	50	-20	60	°C	1),5),6)
Humidity	2)		2)		%RH	1)
Vibration	-	4.9(0.5 G)	-	14.7(1.5 G)	m/s ²	3)
Shock	-	29.4(3 G)	-	294(30 G)	m/s ²	4)
Corrosive Gas	Not Acceptable		Not Acceptable		-	
Illumination at LCD Surface	-	50,000	-	50,000	lx	

- Note 1) Temperature and Humidity should be applied to the glass surface of a IPS-Pro TFT LCD module, not to the system installed with a module.
The brightness of a EEFL tends to drop at low temperature. Besides, the life-time becomes shorter at low temperature.
- 2) $T_a \leq 40^\circ\text{C}$ Relative humidity should be less than 85 %RH max. Dew is prohibited.
 $T_a > 40^\circ\text{C}$ Relative humidity should be lower than the moisture of the 85 %RH at 40°C .

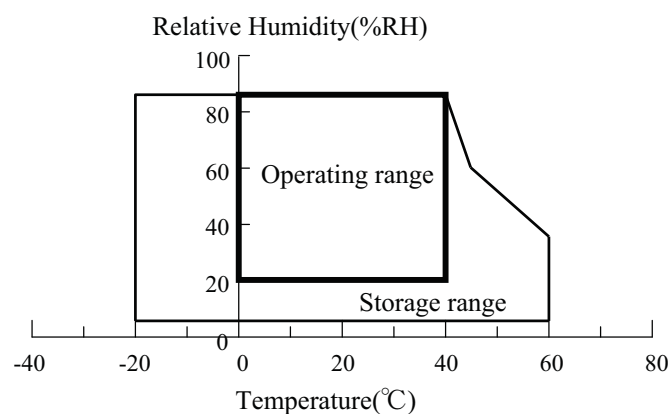

- 3) Frequency of the vibration is between 15 Hz and 100 Hz. (Remove the resonance point) 1 hour.
- 4) Pulse width of the shock is 10 ms.
- 5) Long operation under low temperature may cause some portion of display area to be reddish for several minutes after turning on the product.
However, it does not affect the characteristics and reliability of the product.
- 6) The temperature of LCD front surface would be 65°C in operating, it may affect the optical characteristics however it does not damage the function of the module.

1.2 Electrical Absolute Maximum Ratings

(1)TFT-LCD module

$V_{SS} = 0\text{ V}$

ITEM	SYMBOL	Min.	Max.	UNIT	NOTE
Power Supply Voltage	V_{DD}	0	13.2	V	
Input Voltage for logic	V_I	-0.3	4.0	V	1)
Electrostatic Durability	V_{ESD0}	± 100		V	2),3)
	V_{ESD1}	± 20		kV	2),4)

- Note 1) It is applied to pixel data signal and clock signal.
- 2) Discharge Coefficient : 250 pF - 100 Ω , Environmental : 25°C - 70%RH
- 3) It is applied to I/F connector pins.
- 4) It is applied to the surface of a metallic bezel and a LCD panel.



(2) Backlight unit

GND = 0 V

ITEM	SYMBOL	Min.	Max.	UNIT	NOTE
Input current	I _L	-	8.0	mA _{rms}	1)
Input voltage	V _L	-	(1,500)	V _{rms}	2)

Note 1) The specification shall be applied to each EEFL. The specification is defined at ground line.

2) The specification shall be applied at connector pins for a EEFL at start-up.

2. INITIAL OPTICAL CHARACTERISTICS

The following optical characteristics are measured under stable conditions. It takes about 30 minutes to reach stable conditions. The measuring point is the center of display area unless otherwise noted.

The optical characteristics should be measured in a dark room or equivalent state.


Measuring equipment : CS-1000A, or equivalent

Ambient Temperature =25 °C , V_{DD}=12.0 V , f_V=60 Hz ,

I_L=7mA_{rms} (On duty 70%)

ITEM		SYMBOL	CONDITION	Min.	Typ.	Max.	UNIT	NOTE
Contrast ratio		CR	θ= 0 ° 1)	700	1200	-	-	2)
Response time	Rise	ton		-	8	20	ms	3)
	Fall	toff		-	6	20	ms	3)
Brightness of white		Bwh		350	450	-	cd/m ²	
Brightness uniformity		Buni		-	-	30	%	4)
Color chromaticity (CIE)	Red	x		0.56	0.59	0.62	-	【Gray scale =255】
		y		0.29	0.32	0.35		
	Green	x		0.28	0.31	0.34		
		y		0.55	0.58	0.61		
	Blue	x		0.12	0.15	0.18		
		y	0.04	0.07	0.10			
	White	x	0.248	0.278	0.308			
		y	0.250	0.280	0.310			
Variation of color position (CIE)	Red	Δx	θ= 50 ° φ= 0 °, 90 °, 180 °, 270 ° 1)	-	-	0.04	-	5) 【Gray scale =255】
		Δy		-	-	0.04		
	Green	Δx		-	-	0.04		
		Δy		-	-	0.04		
	Blue	Δx		-	-	0.04		
		Δy		-	-	0.04		
	White	Δx		-	-	0.04		
		Δy		-	-	0.04		
Contrast ratio at 89 °		CR89	6)	10	-	-	-	Estimated value
Image sticking		-	Mosaic pattern	Invisible			-	7)


Note 1) Definition of viewing angle

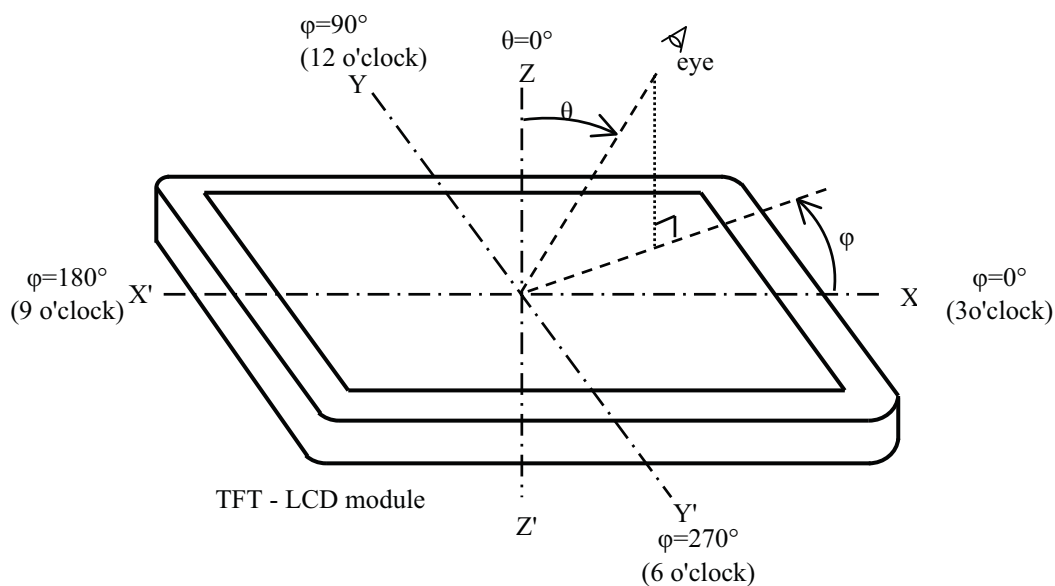

Note 2) Definition of contrast ratio (CR)

$$CR = \frac{\text{(Luminance at displaying WHITE)}}{\text{(Luminance at displaying BLACK)}}$$

3) Definition of response time

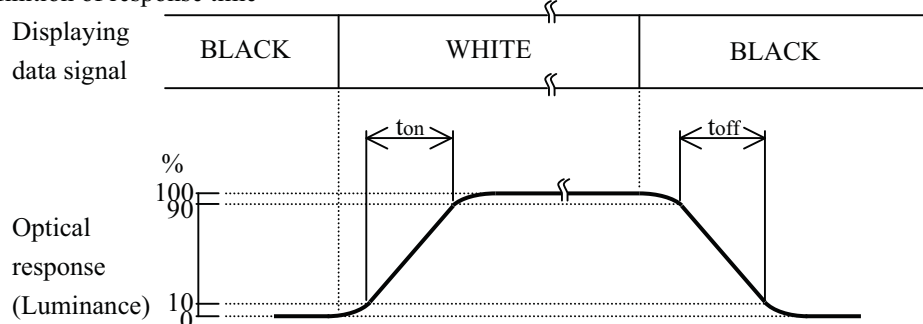

4) Definition of brightness uniformity

Display pattern is white (255 level). The brightness uniformity is defined as the following equation. Brightness at each point is measured, and average, maximum and minimum brightness is calculated.


$$B_{uni} = \frac{|B_{max} \text{ or } B_{min} - B_{ave}|}{B_{ave}} \times 100$$

where, B_{max} = Maximum brightness

B_{min} = Minimum brightness

B_{ave} = Average brightness

$$B_{ave} = \frac{\sum_{k=1}^9 (B(k))}{9}$$

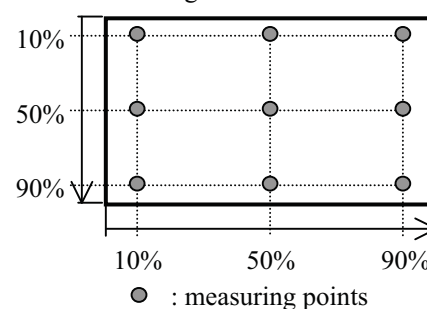

5) Variation of color position on CIE


Variation of color position on CIE is defined as difference between colors at $\theta = 0^\circ$ and at $\theta = 50^\circ$ & $\phi = 0^\circ$, 90° , 180° , 270° .

6) Contrast ratio at 89°

Evaluation conditions are on horizontal & vertical axis

7) Image sticking

Condition : Operating mosaic pattern for 2 hours and gray scale (22 %) for 1 hour.

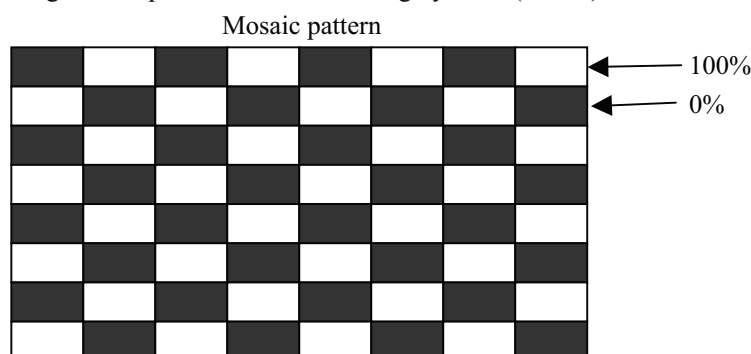


3. ELECTRICAL CHARACTERISTICS

3.1 TFT-LCD module

$T_a = 25\text{ }^{\circ}\text{C}$, $V_{SS} = 0\text{ V}$

ITEM	SYMBOL	Min.	Typ.	Max.	UNIT	NOTE
Power supply voltage	V_{DD}	11.4	12.0	12.6	V	
Power supply current	I_{DD}	-	0.4	0.7	A	1),2)
Ripple voltage of power supply	V_{DDR}	-	-	350	mV	

Note 1) $f_V=60.0\text{Hz}$, $f_{CLK}=85\text{MHz}$, $V_{DD}=12.0\text{V}$, and display pattern is white raster.

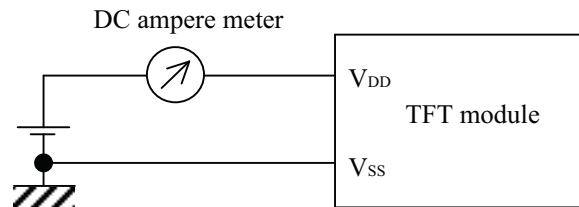

- 2) Current fuse is built in a module. Current capacity of power supply for V_{DD} should be larger than 4A, so that the fuse can be opened at the trouble of electrical circuit of module.

3.2 Back light unit

$T_a = 25\text{ }^{\circ}\text{C}$, $V_{SS} = 0\text{ V}$


ITEM	SYMBOL	Min.	Typ.	Max.	UNIT	NOTE
Input current	I_L	-	7.0	7.5	mArms	1)
Input voltage	V_L	-	810	870	Vrms	$I_L=7\text{mArms}$ (duty100%)
Established starting voltage	at 25°C	V_S	-	820	Vrms	
	at 0°C	-	-	985	Vrms	
Output frequency	f	55.0	57.0	58.0	kHz	2)
EEFL life time	-	50,000	60,000	-	hours	3)

Note 1) The specification shall be applied to each EEFL. The specification is defined at frame ground.


- 2) Frequency of power supply for EEFLs may cause the interference with IMAGE frequency and cause beat or flicker on the display. Therefore, it is recommended to configure EEFL frequency that does not cause interference.
- 3) Life time of a lamp is defined. The life is determined as the time at which brightness of the lamp is 50 % compared to that of initial value at that typical lamp current on condition of continuous operating at $25 \pm 2\text{ }^{\circ}\text{C}$, $I_L = 7\text{mArms}$ (Duty 100%).

4. BLOCK DIAGRAM

4.1 TFT-LCD module

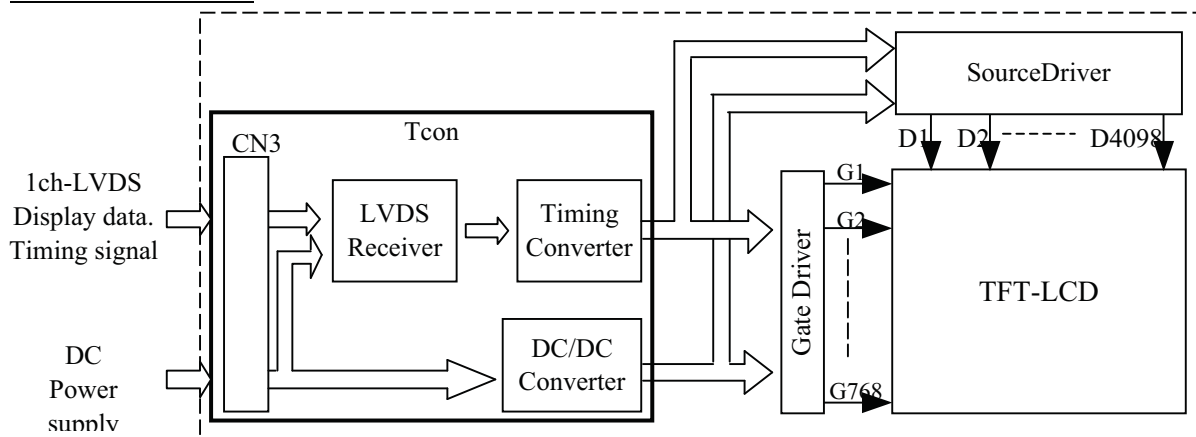

4.2 Back light unit

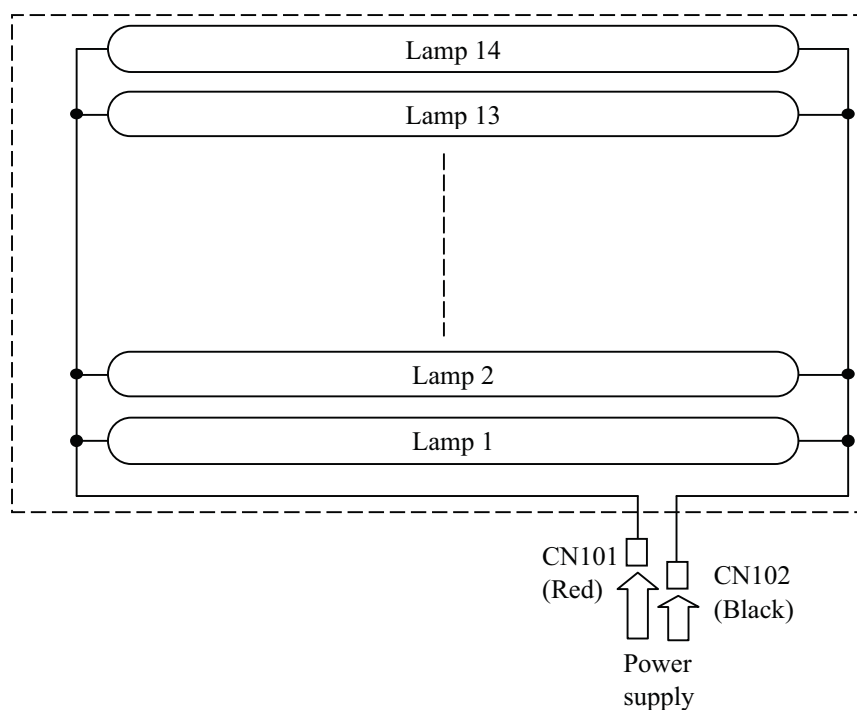



5. INTERFACE PIN ASSIGNMENT

5.1 TFT-LCD module

CN3:JAE FI-X30SSL-HF

(Matching connector : JAE FI-X30C2L)

Pin No.	SYMBOL	Description	Note
1	VDD	Power Supply (typ.+12V)	1)
2	VDD		
3	VDD		
4	VDD		
5	VSS	GND(0V)	2)
6	VSS		
7	VSS		
8	VSS		
9	IC	Internally Connected, Keep Open	
10	IC		
11	VSS	GND(0V)	2)
12	Rx0-	Pixel Data	3)
13	Rx0+		
14	VSS	GND(0V)	2)
15	Rx1-	Pixel Data	3)
16	Rx1+		
17	VSS	GND(0V)	2)
18	Rx2-	Pixel Data	3)
19	Rx2+		
20	VSS	GND(0V)	2)
21	CLK-	Pixel Clock	3)
22	CLK+		
23	VSS	GND(0V)	2)
24	Rx3-	Pixel Data	3)
25	Rx3+		
26	VSS	GND(0V)	2)
27	NC	No Connection	
28	IC	Test	4)
29	NC	No Connection	
30	IC	AGW	5)

Notes 1) All VDD pins shall be connected to +12.0V(Typ.).

2) All VSS pins shall be grounded. Metal bezel is internally connected to VSS.

3) Rx n+ and Rx n- (n=0,1,2,3) should be wired by twist-pairs or side-by-side FPC patterns, respectively.

4) Open : Normal mode. GND : Test mode.

5) Open : Normal mode. GND : Aging mode.


5.2 Back light unit

CN101 and CN102 : JST VYHP-02V

(Matching connector : JST S02B-VYLSS)

Pin No.	SYMBOL	Description	Note
1	HV	Power supply (High voltage)	
2	HV	Power supply (High voltage)	

5.3 Block diagram of interface

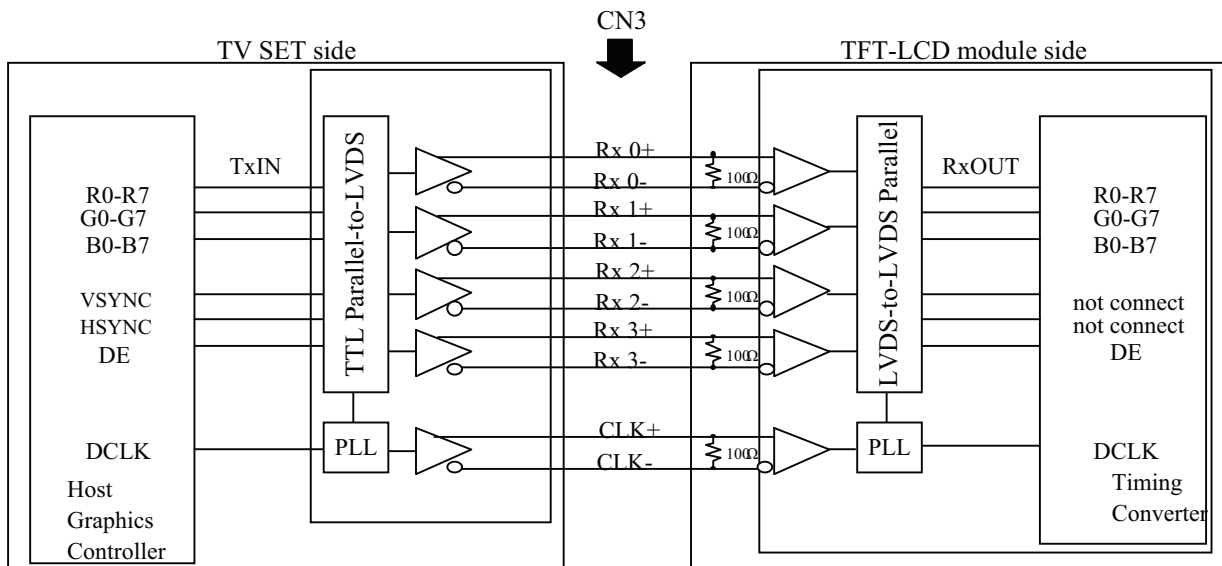

R0~R7 : Pixel R Data (7; MSB, 0; LSB)
 G0~G7 : Pixel G Data (7; MSB, 0; LSB)
 B0~B7 : Pixel B Data (7; MSB, 0; LSB)
 DE : Data Enable

- Note
- 1) The system must have the transmitter to drive the module.
 - 2) LVDS cable impedance shall be 50 ohms per signal line or about 100 ohms per twist-pair line when it is used differentially.



5. 4 LVDS interface

	SIGNAL	TRANSMITTER THC63LVDM83A		INTERFACE CONNECTOR		RECEIVER		TFT CONTROL
		PIN	INPUT	TV Set	TFT-LCD	PIN	OUTPUT	INPUT
24bit	R2	51	Tx IN0	TA OUT0+	Rx 0+	27	Rx OUT0	R2
	R3	52	Tx IN1			29	Rx OUT1	R3
	R4	54	Tx IN2			30	Rx OUT2	R4
	R5	55	Tx IN3			32	Rx OUT3	R5
	R6	56	Tx IN4	TA OUT0-	Rx 0-	33	Rx OUT4	R6
	R7	3	Tx IN6			35	Rx OUT6	R7
	G2	4	Tx IN7			37	Rx OUT7	G2
	G3	6	Tx IN8			38	Rx OUT8	G3
	G4	7	Tx IN9	TA OUT1+	Rx 1+	39	Rx OUT9	G4
	G5	11	Tx IN12			43	Rx OUT12	G5
	G6	12	Tx IN13			45	Rx OUT13	G6
	G7	14	Tx IN14			46	Rx OUT14	G7
	B2	15	Tx IN15	TA OUT1-	Rx 1-	47	Rx OUT15	B2
	B3	19	Tx IN18			51	Rx OUT18	B3
	B4	20	Tx IN19			53	Rx OUT19	B4
	B5	22	Tx IN20			54	Rx OUT20	B5
	B6	23	Tx IN21	TA OUT2+	Rx 2+	55	Rx OUT21	B6
	B7	24	Tx IN22			1	Rx OUT22	B7
	HSYNC	27	Tx IN24			3	Rx OUT24	not connect
	VSYNC	28	Tx IN25			5	Rx OUT25	not connect
	DE	30	Tx IN26	TA OUT2-	Rx 2-	6	Rx OUT26	DE
	R0	50	Tx IN27			7	Rx OUT27	R0
	R1	2	Tx IN5			34	Rx OUT5	R1
	G0	8	Tx IN10	TA OUT3+	Rx 3+	41	Rx OUT10	G0
	G1	10	Tx IN11			42	Rx OUT11	G1
	B0	16	Tx IN16			49	Rx OUT16	B0
	B1	18	Tx IN17			50	Rx OUT17	B1
	RSVD 1)	25	Tx IN23	TA OUT3-	Rx 3-	2	Rx OUT23	not connect
	DCLK	31	TxCLK IN	TxCLK OUT+	RxCLK IN+	26	RxCLK OUT	DCLK
				TxCLK OUT-	RxCLK IN-			

R0~R7 : Pixel R Data (7; MSB, 0; LSB)

G0~G7 : Pixel G Data (7; MSB, 0; LSB)



B0~B7 : Pixel B Data (7; MSB, 0; LSB)

DE : Data Enable

Note 1) RSVD (reserved) pins on the transmitter shall be tied to"H"or"L".

5. 5 Correspondence between input data and display image

Display data of adjacent one pixel is latched during one cycle of DCLK.

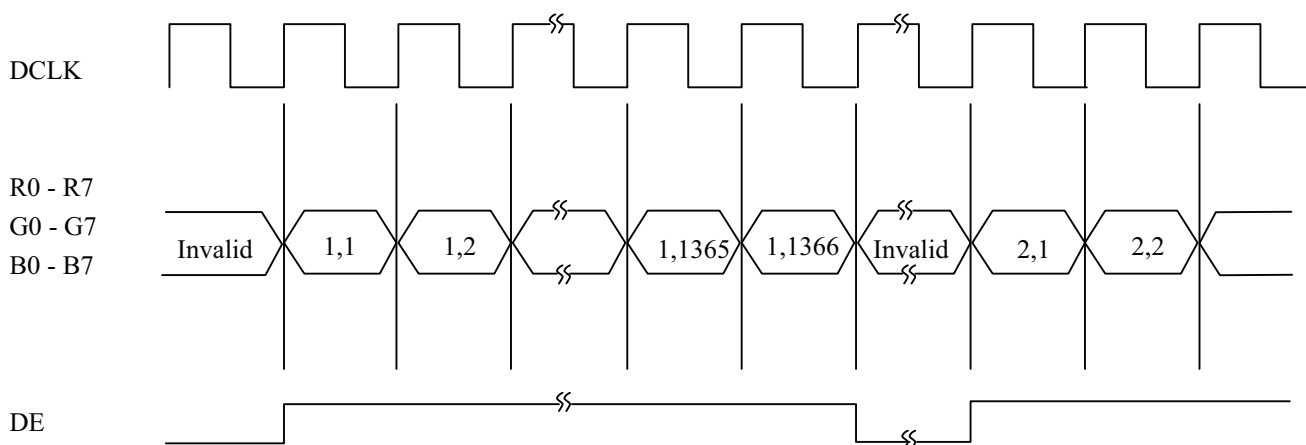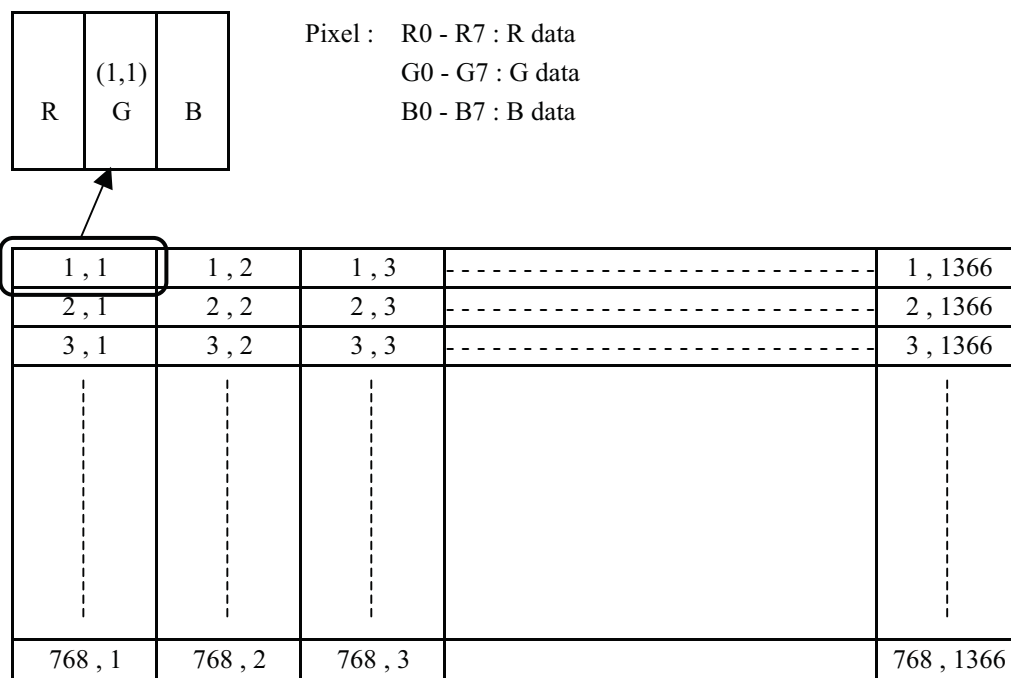



5. 6 Relationship between display colors and input signals

Input Color		Red Data								Green Data								Blue Data							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
		MSB								LSB								MSB							
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green (2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	Blue (2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue (254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue (255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note 1) Definition of gray scale :


Color(n) · · · · Number in parenthesis indicates gray scale level.

Larger n correspondsto brighter level.

2) Data : 1 : High, 0 : Low

6. INTERFACE TIMING

6.1 LVDS receiver timing

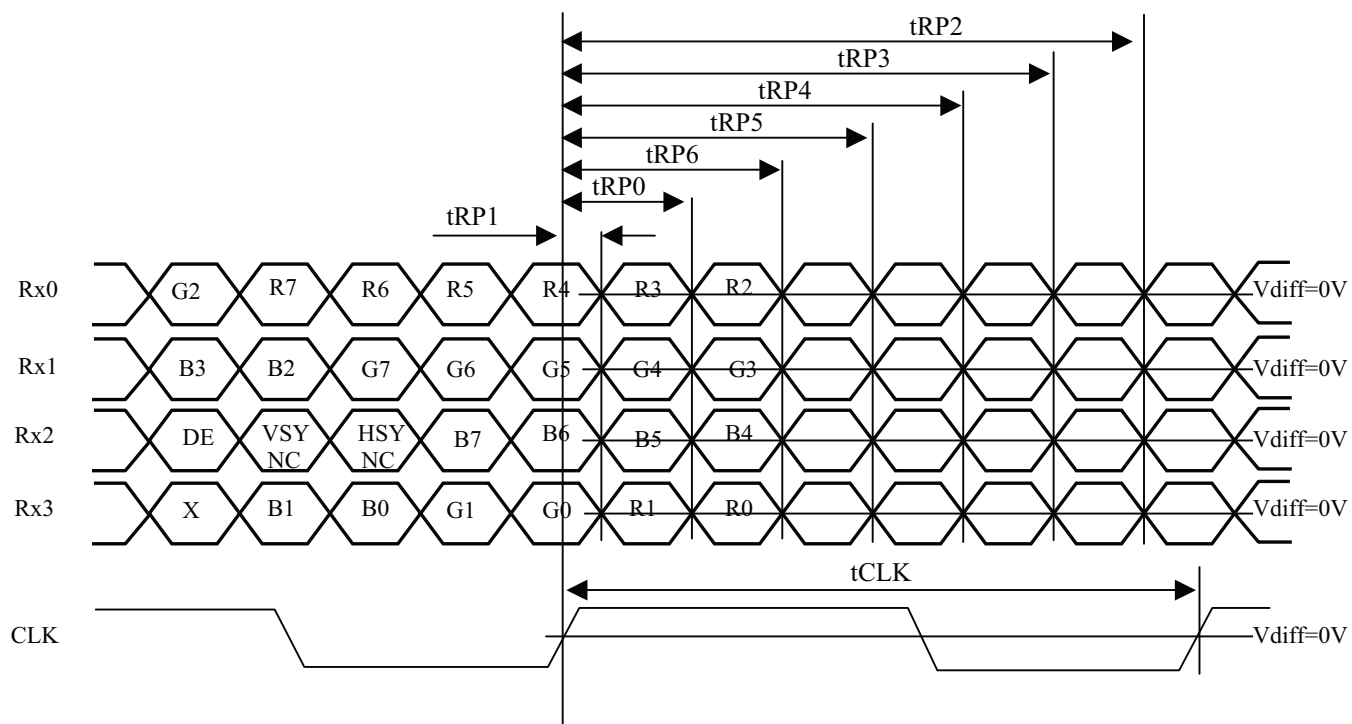

$$Rx0=(Rx0+)-(Rx0-)$$

$$Rx1=(Rx1+)-(Rx1-)$$


$$Rx2=(Rx2+)-(Rx2-)$$

$$Rx3=(Rx3+)-(Rx3-)$$

$$CLK=(CLK+)-(CLK-)$$

ITEM		SYMBOL	Min.	Typ.	Max.	UNIT	NOTE
CLK	Frequency (at 50 Hz)	DCLK	68	78	87	MHz	=1/tclk
	Frequency (at 60 Hz)		78	85	87	MHz	=1/tclk
	CLK Skew	tSC	- 4.0	0	+ 4.0	ns	
Rx*0 Rx*1 Rx*2 Rx*3	0 data position	tRP0	1/7tCLK - 0.4	1/7tCLK	1/7tCLK + 0.4	ns	
	1st data position	tRP1	- 0.4	0	+ 0.4		
	2nd data position	tRP2	6/7tCLK - 0.4	6/7tCLK	6/7tCLK + 0.4		
	3rd data position	tRP3	5/7tCLK - 0.4	5/7tCLK	5/7tCLK + 0.4		
	4th data position	tRP4	4/7tCLK - 0.4	4/7tCLK	4/7tCLK + 0.4		
	5th data position	tRP5	3/7tCLK - 0.4	3/7tCLK	3/7tCLK + 0.4		
Rx*3	6th data position	tRP6	2/7tCLK - 0.4	2/7tCLK	2/7tCLK + 0.4		

6.2 Synchronization signal timing

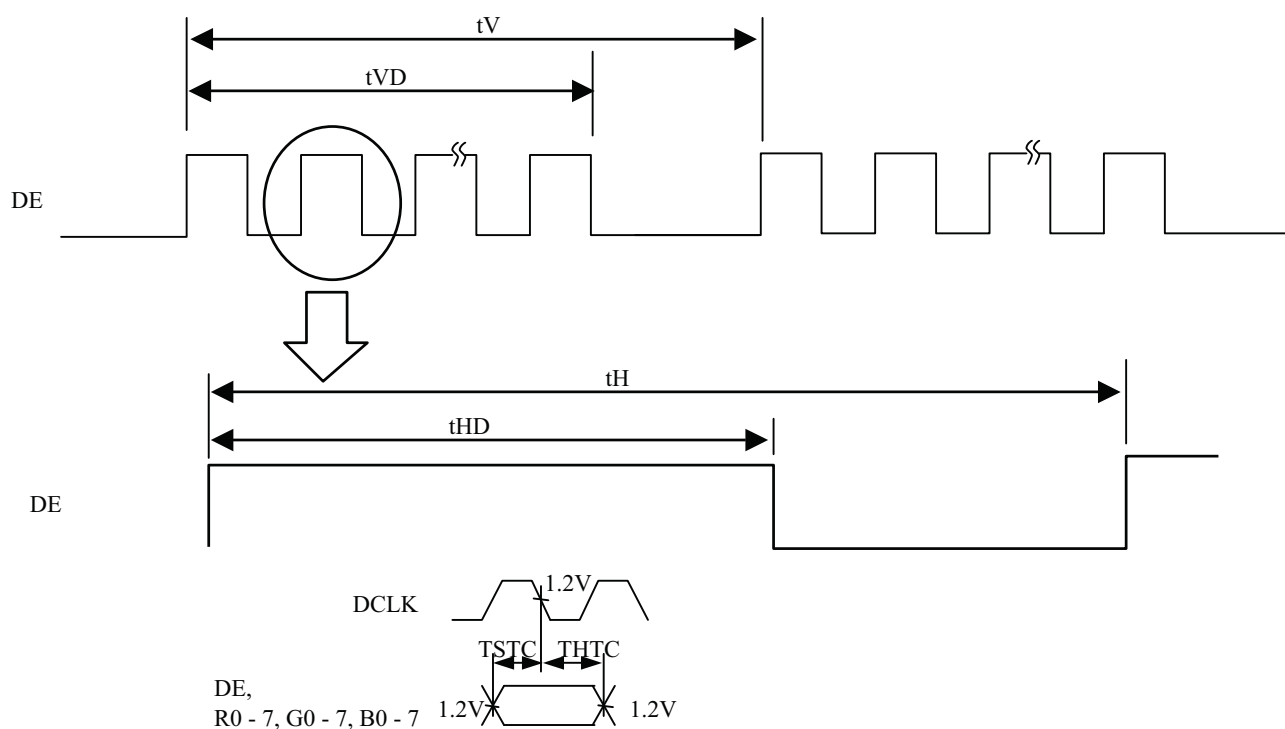

Note 1) Reference level for each timing signal is 1.2 V unless it is stated on the chart, high level voltage(VIH) and low level voltage(VIL) are defined as follows:

$$V_{IH} \geq 2.0 \text{ V} \quad V_{IL} \leq 0.8 \text{ V}$$

2) The timing of DCLK to other signals conforms to the specifications of LVDS transmitter.


I) 50Hz

ITEM	SYMBOL	Min.	Typ.	Max.	UNIT	NOTE
DE	Vertical frequency	fV	48	50	52	Hz
	Vertical period	tV	773	860	1000	tH
	Vertical valid	tVD	768			tH
	Horizontal frequency	fH	-	43	-	kHz
	Horizontal period	tH	1400	1814	2000	tCLK
	Horizontal valid	tHD	1366			tCLK

II) 60Hz

ITEM	SYMBOL	Min.	Typ.	Max.	UNIT	NOTE
DE	Vertical frequency	fV	58	60	62	Hz
	Vertical period	tV	773	773	1000	tH
	Vertical valid	tVD	768			tH
	Horizontal frequency	fH	-	46.4	-	kHz
	Horizontal period	tH	1400	1833	2000	tCLK
	Horizontal valid	tHD	1366			tCLK

6.3 Timing between interface signals power supply

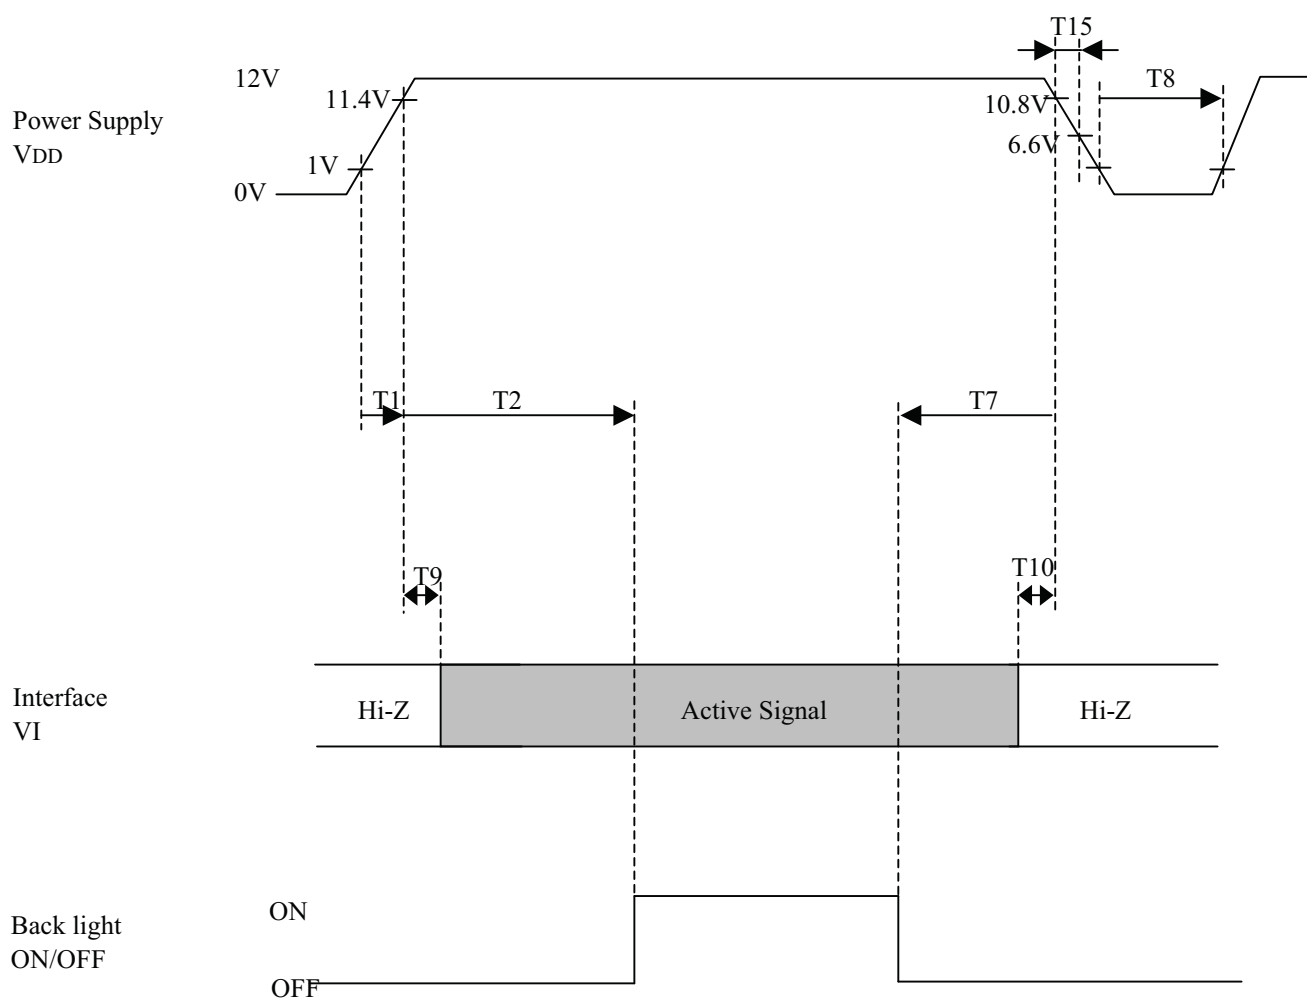


$$0 \leq T1 \leq 10$$
$$350 \leq T2$$

$$0 \leq T7$$
$$350 \leq T8$$
$$10 \leq T9$$
$$0 \leq T10$$
$$10 < T15$$

Unit : ms

7. DIMENSIONAL OUT LINE

(1) FRONT VIEW

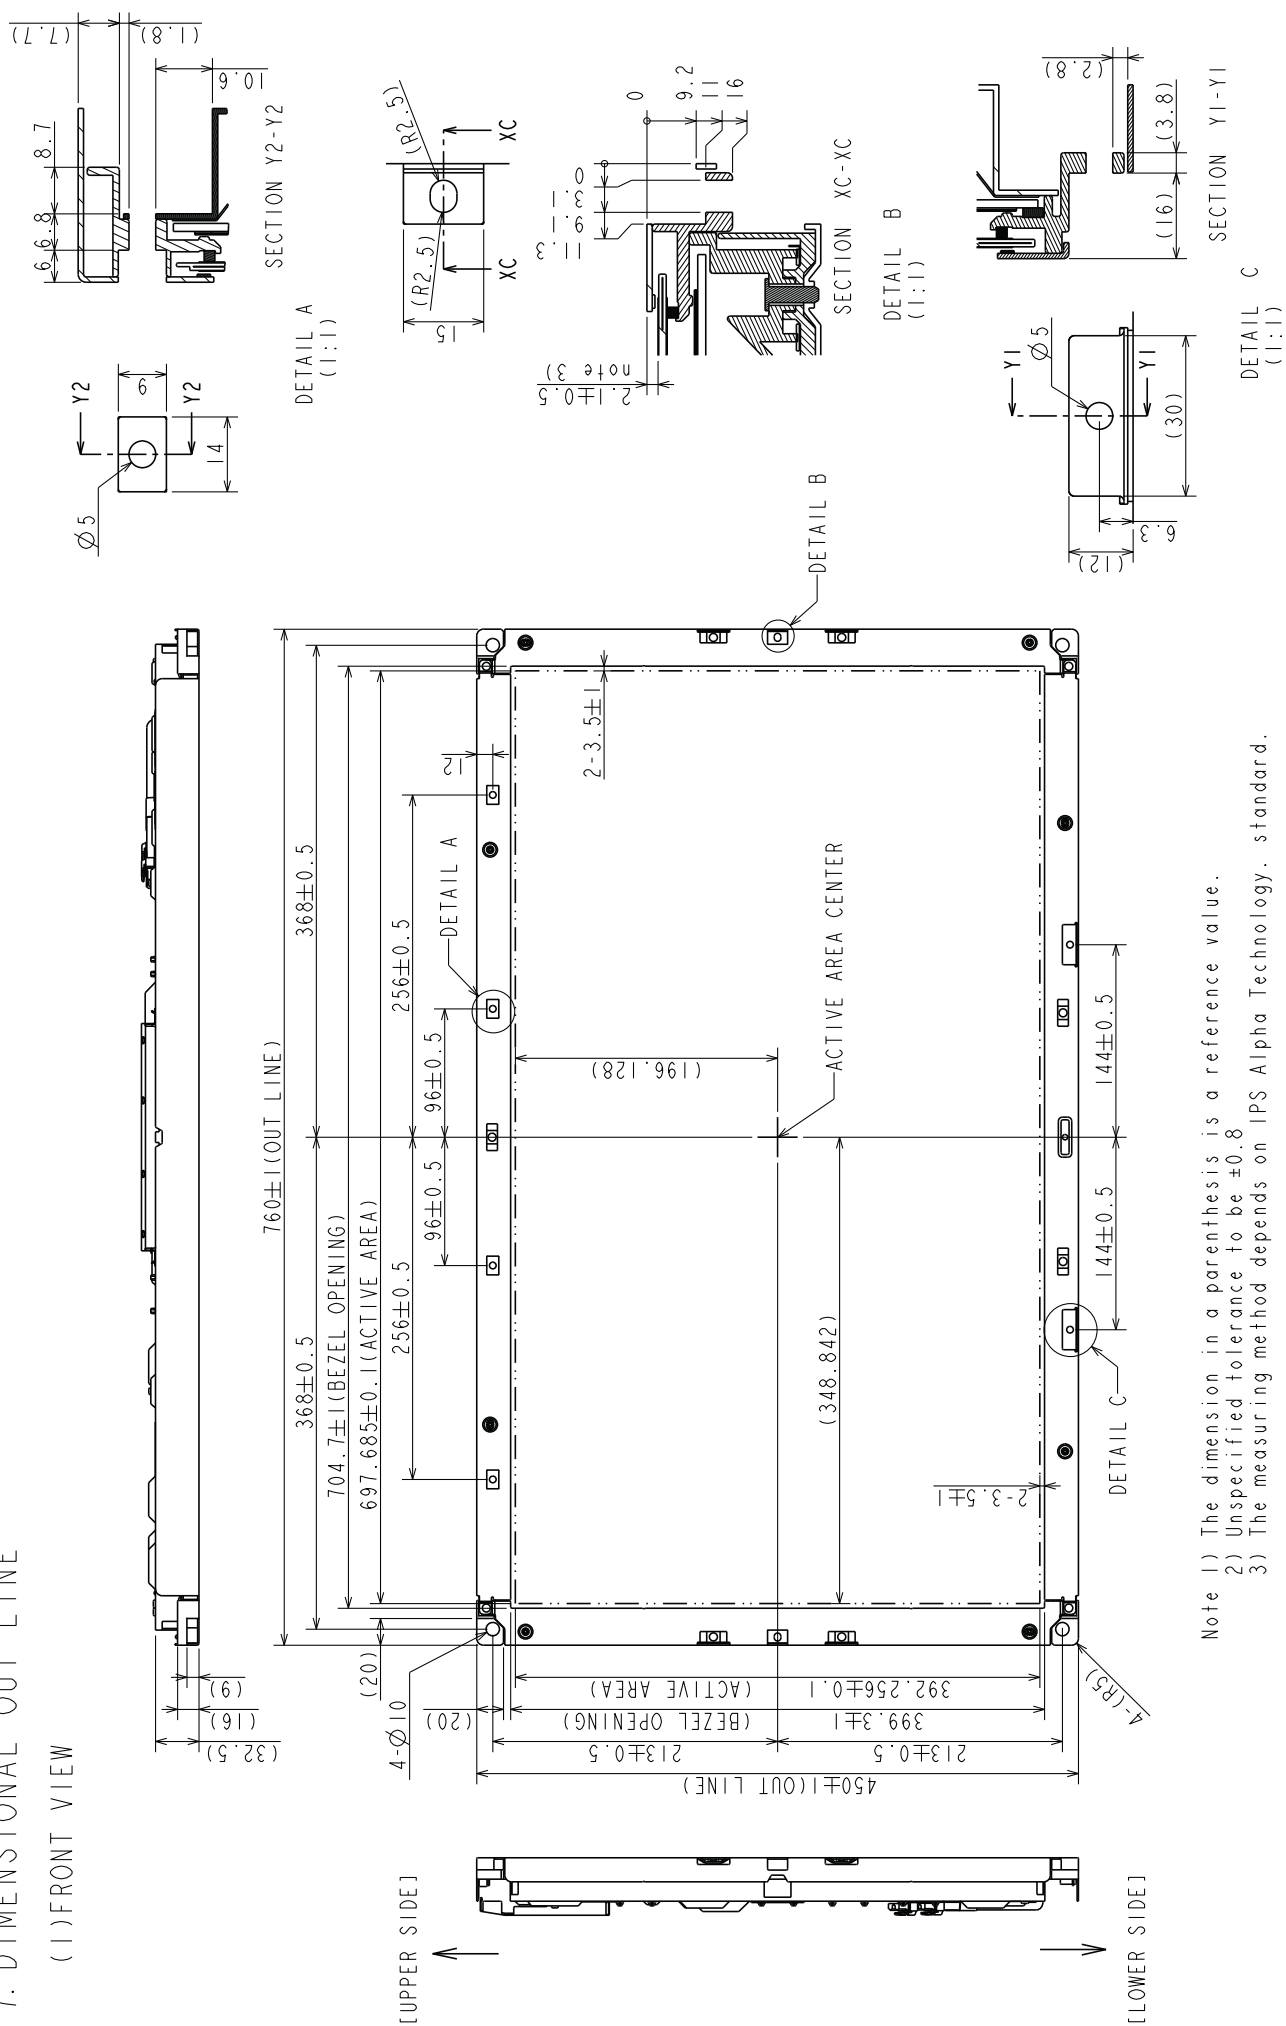


Note 1) The dimension in a parenthesis is a reference value.

2) Unspecified tolerance to be ± 0.8

33) The measuring method depends on IPS Alpha Technology. standard.

IPS Alpha Technology, Ltd.	Date	Oct. 20, 2009	Sh. No.	IPS4PS 2610-AX080B052E-1	Page	10 - 1 / 2
----------------------------	------	---------------	---------	--------------------------	------	------------

(2) BACK VIEW

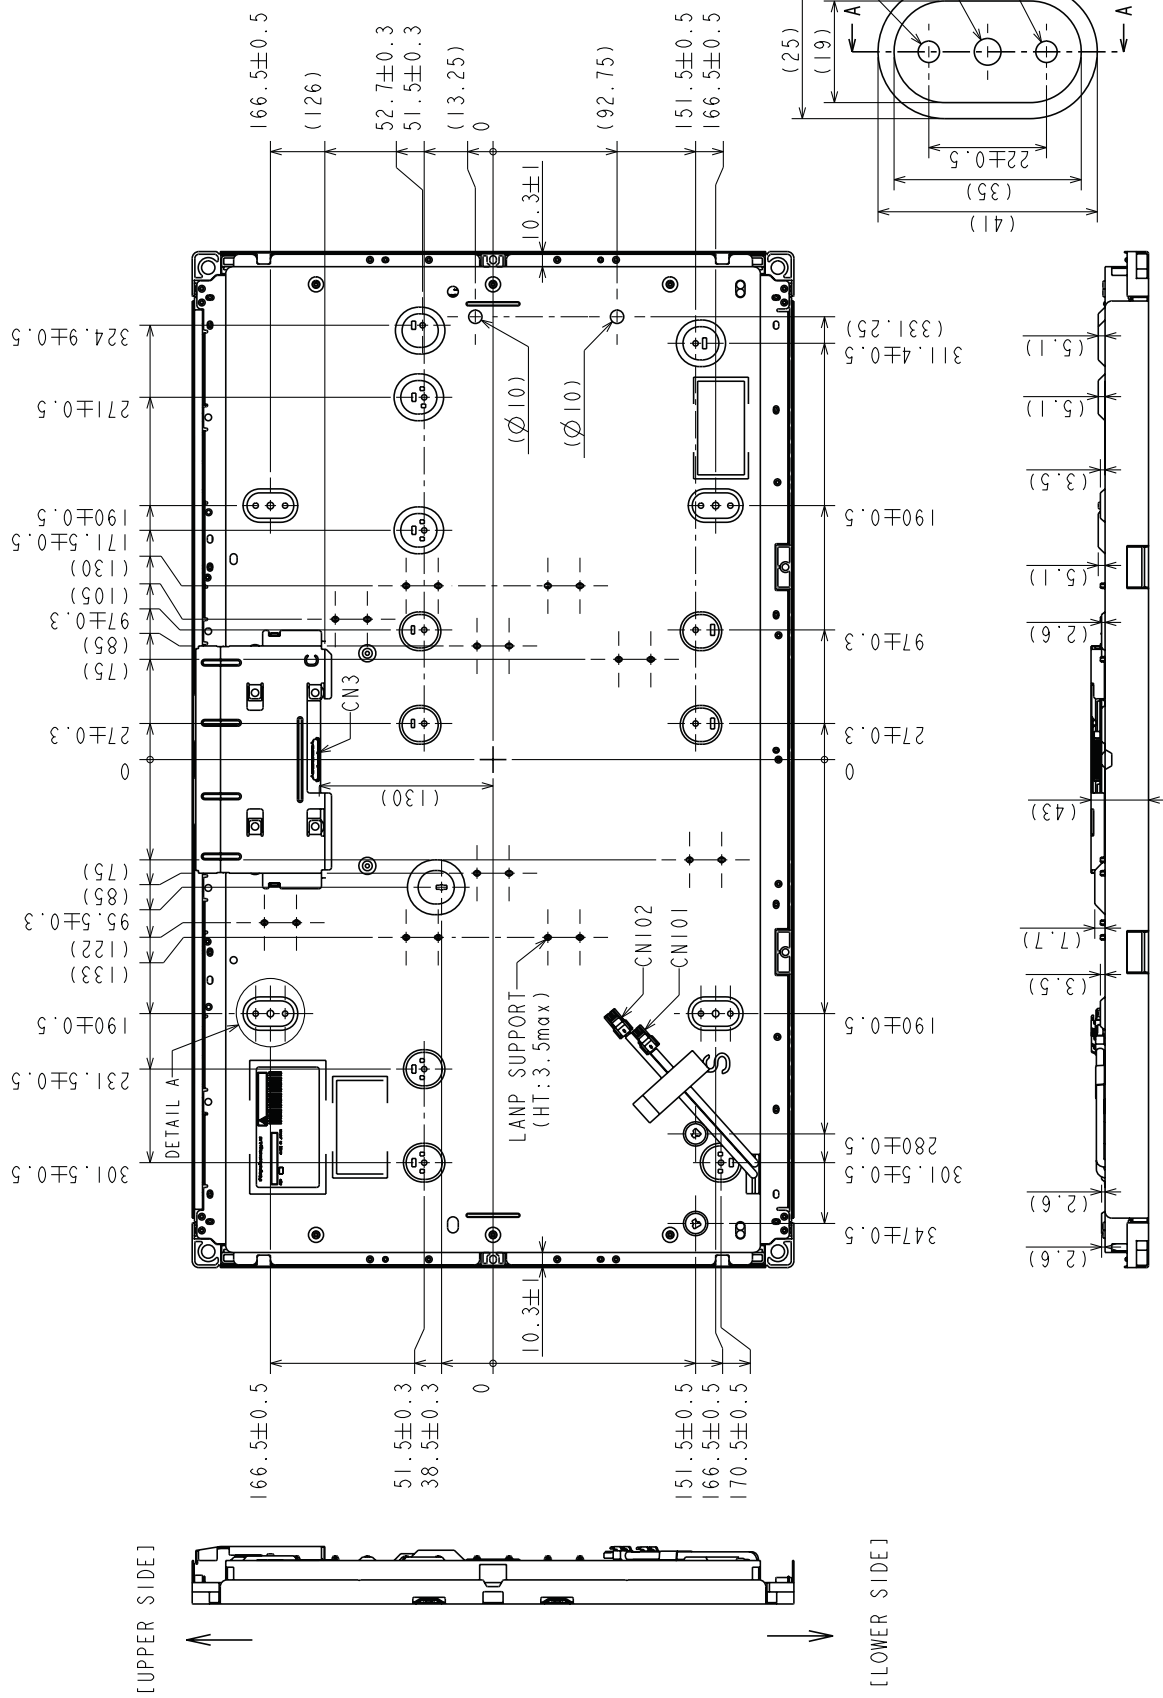

Note 1) The dimension in a parenthesis is a reference value.

2) Unspecified tolerance to be ±0.8

3) Torque MAX. 1.47N·m(15kgf·cm)


IPS Alpha Technology, Ltd.	Date	Oct.20,2009	Sh. No.	IPS4PS 2610-AX080B052E-I	Page	10-2/2
----------------------------	------	-------------	---------	--------------------------	------	--------

8. LABEL FORMAT

8.1 Label

The label is on the metallic bezel as shown in 7. External Dimensional.


The style of character will be changed without notice.

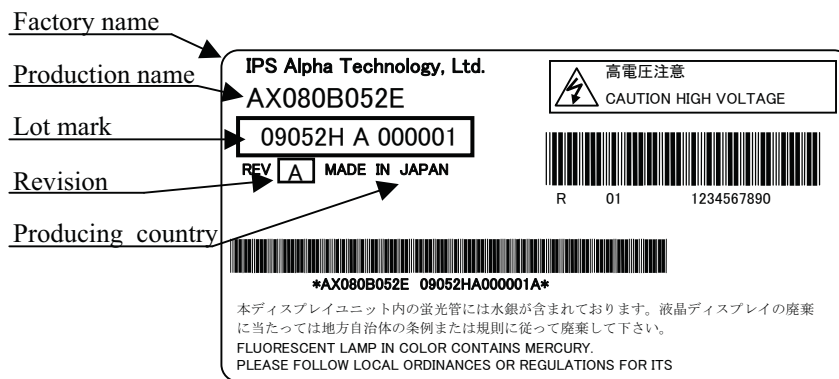

8.2 Revision (REV.) control

REV. is the column for manufacturing convenience. A-Z except I and O may be written on this column.

8.3 Lot mark

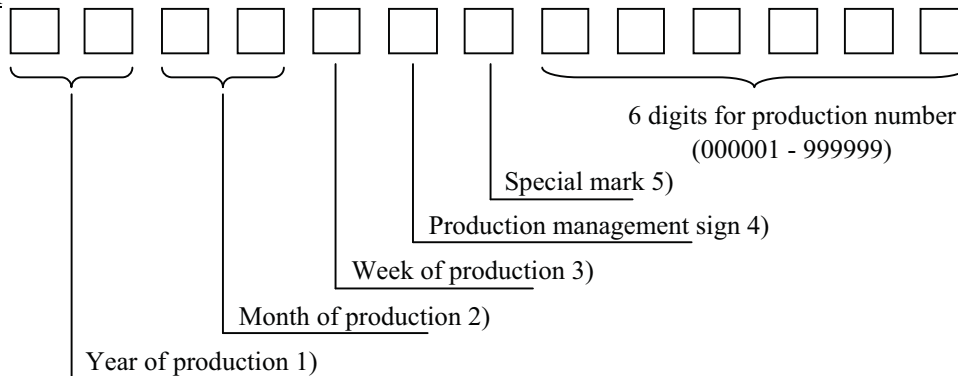

Notes 1)

Mark	Year
09	2009
10	2010
11	2011

2)

Mark	Month	Mark	Month
01	1	07	7
02	2	08	8
03	3	09	9
04	4	10	10
05	5	11	11
06	6	12	12

3)

Week mark	Day
1	1~7
2	8~14
3	15~21
4	22~28
5	29~31

4) H : Made by IPS Alpha Technology, Ltd.(Mobara)

U : Made by IPS Alpha Technology, Ltd.(Utsunomiya)

5)

Mark	Liquid crystal		Color filter		Glass	
	Maker A	Maker B	Maker A	Maker B	Maker A	Maker B
A	○		○		○	
B		○	○		○	
C	○			○	○	
D		○		○	○	
J	○		○			○
K		○	○			○
L	○			○		○
M		○		○		○




8.4 Record of revision descrived on the label

Factory		Revision	Gate Driver			Optical Sheet			Drain Driver		Tcon		EEFL		Backlight		
αJ	αU		MakerA GTI	MakerB 08	MakerC 電線	A 300	B 400	C 350	MakerA 09三星	MakerB 08Pana	102	107	JAPAN	KOREA	αJ	αM	METCO
○	○	B	○	—	—	—	○	—	○	—	○	—	○	—	○	—	—
○	○	C	—	○	—	—	○	—	○	—	○	—	○	—	○	—	—
○	○	D	—	—	○	—	○	—	○	—	○	—	○	—	○	—	—
○	○	E	—	○	—	—	○	—	—	○	○	—	○	—	○	—	—
○	○	F	—	○	—	—	○	—	—	○	—	○	○	—	○	—	—
○	○	G	—	—	○	—	○	—	○	—	—	○	○	—	○	—	—
○	○	H	—	○	—	—	—	○	—	○	○	—	○	—	○	—	—
○	○	J	—	—	○	—	—	○	○	—	○	—	○	—	○	—	—
○	○	K	—	○	—	—	—	○	—	○	—	○	○	—	○	—	—
○	○	L	—	—	○	—	—	○	○	—	—	○	○	—	○	—	—
○	○	M	—	○	—	—	○	—	○	—	○	—	—	○	○	—	—
○	○	N	—	—	○	—	○	—	○	—	○	—	—	○	○	—	—
○	○	P	—	○	—	—	○	—	—	○	○	—	—	○	○	—	—
○	○	Q	—	○	—	—	○	—	—	○	—	○	—	○	○	—	—
○	○	R	—	—	○	—	○	—	○	—	—	○	—	○	○	—	—
○	○	S	—	○	—	—	—	○	—	○	○	—	—	○	○	—	—
○	○	T	—	—	○	—	—	○	○	—	○	—	—	○	○	—	—
○	○	U	—	○	—	—	—	○	—	○	—	○	—	○	○	—	—
○	○	V	—	—	○	—	—	○	○	—	—	○	—	○	○	—	—
○	○	W	—	○	—	—	—	○	—	○	—	○	○	—	—	○	—
○	○	X	—	—	○	—	—	○	○	—	—	○	○	—	—	○	—
—	○	Y	—	—	○	—	—	○	○	—	—	○	○	—	—	—	○
—	○	Z	—	—	○	—	—	○	○	—	—	○	—	○	—	—	○



8.5 Samples of the product labels by production bases

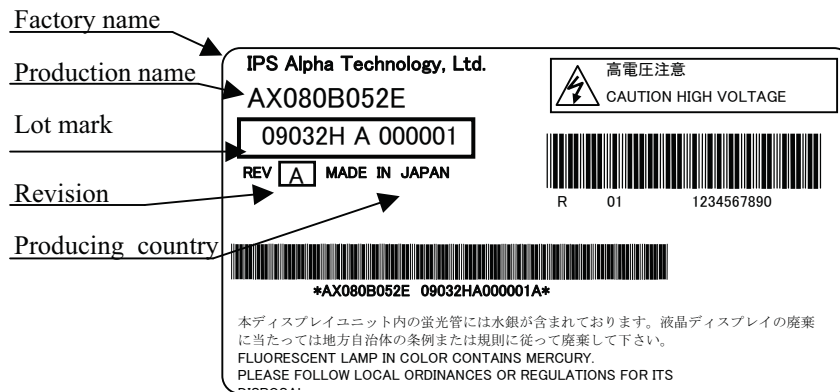

Product by IPS Alpha Technology, Ltd. (Mobara)



Product by IPS Alpha Technology, Ltd.(Utsunomiya)

9. COSMETIC SPECIFICATIONS

9.1 Condition for cosmetic inspection


(1) Viewing zone

- a) The figure shows the correspondence between eyes (of inspector) and TFT-LCD module.

$\theta \leq 45^\circ$: when non-operating inspection

$\theta \leq 5^\circ$: when operating inspection

- b) Inspection should be executed only from front side and only A-zone.
Cosmetic of B-zone and C-zone are ignore.
(refer to 9.2 Definition of zone)

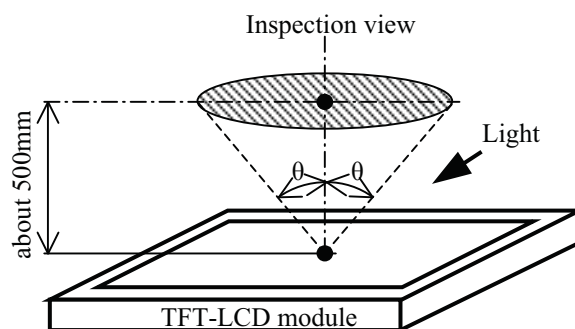


(2) Environmental

- a) Temperature : 25 degrees
b) Ambient light : about 700 lx and non-directive when operating inspection.
: about 1000 lx and non-directive when non-operating inspection.
c) Backlight : when non-operating inspection, backlight should be off .

9.2 Definition of zone

- A-zone : Display area (pixel area)
- B-zone : Area between A-zone and C-zone
- C-zone : Metallic bezel area

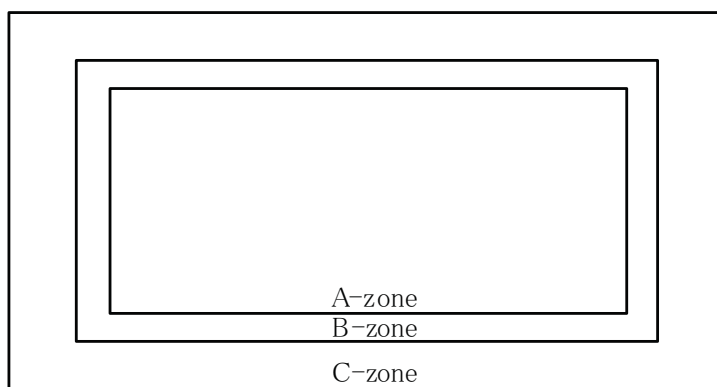

9.3 Cosmetic specifications

When displaying conditions are not stable (ex. at turn on or off), the following specifications are not applied.

	No	ITEM			Max. acceptable number		Unit	Note
					Bright defect	Low bright defect		
Operating inspection	1	Dot defect	Sparkle mode	1-dot	0	4	pcs	1),2),4)
				2-dots	0		Units	1),2),5)
				3-dots	0			
				Density	0		pcs/φ20mm	1),2),6)
				Total	4		pcs	1),2)
			Black mode	1-dot	7		pcs	1),3),4)
				2-dots	0		Units	1),3),5)
				3-dots	0			
				Density	3		pcs/φ20mm	1),3),6)
				Total	7		pcs	1),3)
			Total	9		pcs	1)	
	2	Line defect			Serious one is not allowed		-	-
	3	Uneven brightness						



	No	ITEM			Max. acceptable number		Unit	Note
					Bright defect	Low bright defect		
Operating inspection	4	Stain inclusion ⎧ Line shape W : width (mm) L : length (mm) ⎫	W≤0.02	L : Ignore	Ignore		pcs	7)
			W≤0.04	L≤4.0	8			
				L>4.0	0			
			W≤0.08	L≤2.0	8			
				L>2.0	0			
	W>0.08	-	(See dot shape)					
	5	Stain inclusion ⎧ Dot shape D : ave. dia (mm) ⎫	D≤0.22		Ignore		pcs	7)
			D≤0.5		8			
			D>0.5		0			
	6	Scratch on polarizer ⎧ Line shape W : width (mm) L : length (mm) ⎫	W≤0.02	L : Ignore	Ignore		pcs	8)
			W≤0.08	L≤20	10			
				L>20	0			
			W>0.08	-	0			
	7	Scratch on polarizer ⎧ Dot shape D : ave. dia (mm) ⎫	D≤0.2		Ignore		pcs	8)
			D≤0.6		10			
			D>0.6		0			
Non operating inspection	8	Bubbles, peeling in polarizer 〔D : ave. dia (mm)〕	D≤0.2		Ignore		pcs	8)
			D≤0.5		10			
			D>0.5		0			
	9	Wrinkles on polarizer			Serious one is not allowed.		-	-

Note 1) Dot defect : defect area > 1/2 dot

2) Sparkle mode :

bright defect $G > 24.3\%$

$R > 24.3\%$

$B > 24.3\%$

low bright defect $24.3\% \geq G > 4.1\%$

$24.3\% \geq R > 7.8\%$

$24.3\% \geq B > 18.0\%$

3) Black mode : brightness of dot is less than 70% at white. (visible to eye)

4) 1 dot : defect dot is isolated, not attached to other defect dot.

5) N dots : N defect dots are consecutive. (N means the number of defects dots)

6) Density : number of defect dots inside $\phi 20\text{mm}$

7) Those stains which can be wiped out easily are acceptable.

8) Polarizer area inside of B-zone is not applied.

9) No major (serious) defects when viewed in gray scale mode.

10. PRECAUTION

Please pay attention to the followings when a TFT module with a back-light unit is used, handled and mounted.

10.1 Precaution to handling and mounting

- (1) Applying strong force to a part of the module may cause partial deformation of frame or mold, and cause damage to the display.
- (2) The module should gently and firmly be held by both hands. Never hold by just one hand in order to avoid any internal damage. Never drop or hit the module.
- (3) The module should be installed with mounting holes of a module.
- (4) Uneven force such as twisted stress should not be applied to a module when a module is mounted on the cover case. The cover case must have sufficient strength so that external force can not be transmitted directly to a module.
- (5) It is recommended to leave a space between a module and a holding board of a module so that partial force is not applied to a module.

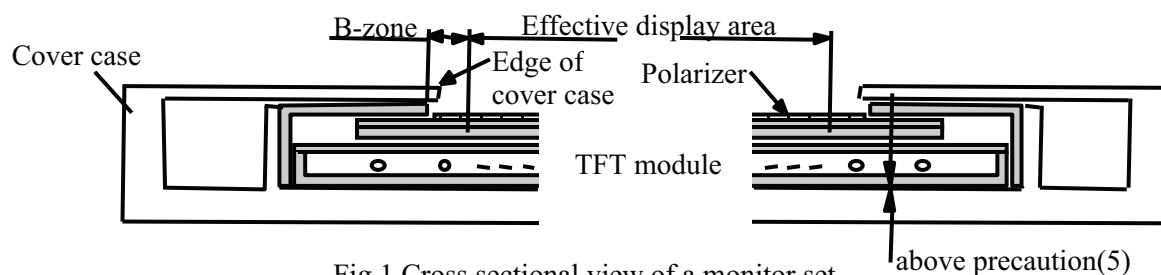


Fig.1 Cross sectional view of a monitor set

- (6) The edge of a cover case should be located inside more than 1mm from the edge of a module front frame.
- (7) A transparent protective plate should be added on the display area of a module in order to protect a polarizer and TFT cell. The transparent protective plate should have sufficient strength so that the plate can not touch a module by external force.
- (8) Materials included acetic acid and choline should not be used for a cover case as well as other parts and boards near a module. Acetic acid attacks a polarizer. Choline attacks electric circuits due to electro-chemical reaction.
- (9) The polarizer on a TFT cell should carefully be handled due to its softness, and should not be touched, pushed or rubbed with glass, tweezers or anything harder than HB pencil lead. The surface of a polarizer should not be should be stored in the IPS Alpha's shipping box.
- (10) The surface of a polarizer should be gently wiped with absorbent cotton, chamois or other soft materials slightly contained petroleum benzene when the surface becomes dirty. Normal-hexane or Isopropyl alcohol as cleaning chemicals is recommended in order to clean adhesives which fix front/rear polarizers on a TFT cell. Other cleaning chemicals such as acetone, toluen and alcohol should not be used to clean adhesives because they cause chemical damage to a polarizer.
- (11) Saliva or water drops should be immediately wiped off. Otherwise, the portion of a polarizer may be deformed and its color may be faded.
- (12) The module should not be opened or modified. It may cause not to operate properly.
- (13) Metallic bezel of a module should not be handled with bare hand or dirty gloves. Otherwise, color of a metallic frame may become dirty during its storage. It is recommended to use clean soft gloves and clean finger stalls when a module is handled at incoming inspection process and production (assembly) process.
- (14) Lamp(EEFL) cables should not be pulled and held.

10.2 Precaution to operation

- (1) The ambient temperature near the operated module should be satisfied with the absolute maximum ratings. Unless it meets the specifications, sufficient cooling system should be adopted to system.
- (2) The spike noise causes the mis-operation of a module. The level of spike noise should be as follows:

$$-200\text{mV} \leq \text{over- and under- shoot of VDD} \leq +200\text{mV}$$

VDD including over- and under- shoot should be satisfied with the absolute maximum ratings.

IPS Alpha Technology, Ltd.	Date	Oct.20,2009	Sheet No.	IPS4PS 2613 AX080B052E-5	Page	13-1/3
----------------------------	------	-------------	-----------	--------------------------	------	--------



- (3) Optical response time, luminance and chromaticity depend on the temperature of a TFT module. Response time and saturation time of EEFL luminance become longer at lower temperature operation.
- (4) Sudden temperature change may cause dew on and/or in the a module. Dew males damage to a polarizer and/or electrical contacting portion. Dew causes fading of displayed quality.
- (5) Fixed patterns displayed on a module for a long time may cause after-image. It will be recovered soon.
- (6) A module has high frequency circuits. Sufficient suppression to electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be effective to minimize the interference.
- (7) Noise may be heard when a back-light is operated. If necessary, sufficient suppression should be done by system manufacturers.
- (8) The module should not be connected or removed while a main system works.
- (9) Inserting or pulling I/F connectors causes any trouble when power supply and signal dates are on-state. I/F connectors should be inserted and pulled after power supply and signal dates are turned off.

10.3 Electrostatic discharge control

- (1) Since a module consists of a TFT cell and electronic circuits with CMOS-ICs, which are very weak to electrostatic discharge, persons who are handling a module should be grounded through adequate methods such as a list band. I/F connector pins should not be touched directly with bare hands.
- (2) Protection film for a polarizer on a module should be slowly peeled off so that the electrostatic charge can be minimized.

10.4 Precaution to strong light exposure

- (1) A module should not be exposed under strong light. Otherwise, characteristics of a polarizer and color filter in a module may be degraded.

10.5 Precaution to storage

When modules for replacement are stored for a long time, following precautions should be taken care of:

- (1) Modules should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during storage. Modules should be stored at 0 to 35-C at normal humidity (60%RH or less).
- (2) The surface of polarizers should not come in contact with any other object. It is recommended that modules should be stored in the IPS Alpha's shipping box.

10.6 Precaution to handling protection film

- (1) The protection film for polarizers should be pealed off slowly and carefully by persons who are electrically grounded with adequate methods such as a list band. Besides, ionized air should be blown over during peeling action. Dusts on a polarizer should be blown off by an ionized nitrogen gun and so on.
- (2) The protection film should be peeling off without rubbing it to the polarizer. Because, if the film is rubbed together with the polarizer, since the film is attached to the polarizer with a small amount of adhesive, the adhesive may remain on a polarizer.
- (3) The module with protection film should be stored on the conditions explained in 10.5 (1). However, in case that the storage time is too long, adhesive may remain on a polarizer even after a protection film is peeled off. Besides, in case that a module is stored at higher temperature and/or higher humidity, adhesive may remain on a polarizer. The remained adhesive may cause non-uniformity of display image.
- (4) The adhesive can be removed easily with Normal-Hexane or Isopropyl alcohol. The remained adhesive or its vestige on the polarizer should be wiped off with absorbent cotton or other soft materials such as chamois slightly contained Normal-Hexane or Isopropyl alcohol.

10.7 Safety

- (1) Since a TFT cell and lamps are made of glass, handling to the broken module should be taken care sufficiently in order not to be injured. Hands touched liquid crystal from a broken cell should be washed sufficiently.

IPS Alpha Technology, Ltd.	Date	Oct.20,2009	Sheet No.	IPS4PS 2613 AX080B052E-5	Page	13-2/3
----------------------------	------	-------------	-----------	--------------------------	------	--------



- (2) The module should not be taken apart during operation so that backlight drives by high voltage.

10.8 Environmental protection

- (1) The TFT module contains cold cathode fluorescent lamps. Please follow local ordinance or regulations for its disposal.
- (2) Flexible printed circuits and printed circuits board used in a module contain small amount of lead. Please follow local ordinance or regulations for its disposal.

10.9 Use restrictions and limitations

- (1) This product is not authorized for use in life support devices or systems, military applications or other applications which pose a significant risk of personal injury.
- (2) In no event shall IPS Alpha Technology, Ltd., be liable for any incidental, indirect or consequential damages in connection with the installation or use of this product, even if informed of the possibility thereof in advance. These limitations apply to all causes of action in the aggregate, including without limitation breach of contract, breach of warranty, negligence, strict liability, misrepresentation and other torts.

10.10 Precaution to setting inverter

- (1) Please use inverter output waveform that satisfies following formulae.

$$0.9 \cdot \sqrt{2} \cdot I_{rms} < |I_p| < 1.1 \cdot \sqrt{2} \cdot I_{rms}$$

$$0.9 \cdot \sqrt{2} \cdot I_{rms} < |I-p| < 1.1 \cdot \sqrt{2} \cdot I_{rms}$$

I_p Peak value of lamp current at positive side

$I-p$ Peak value of lamp current at negative side

Also, please use sine wave with symmetric positive and negative wave that both area and peak of IL and VL waveforms are within 10% of asymmetry rate, and that do not develop spike wave. Otherwise there is a possibility to develop lighting defect.


- (2) After this product is stored for a long time, it might take longer to discharge lamp. It is recommended that auxiliary illuminant (LED, etc.) is set.
- (3) Since multiple lamps are closely-mounted to the back-light, please use inverter that output waveform is synchronized. If different phase inverter is used, it might cause luminance depression or short life span by phase difference.


10.11 Others

Electrical components which may not affect electrical performance are subjective to change without notice because of their availability.


IPS Alpha Technology, Ltd.	Date	Oct.20,2009	Sheet No.	IPS4PS 2613 AX080B052E-5	Page	13-3/3
----------------------------	------	-------------	-----------	--------------------------	------	--------

11.Packing

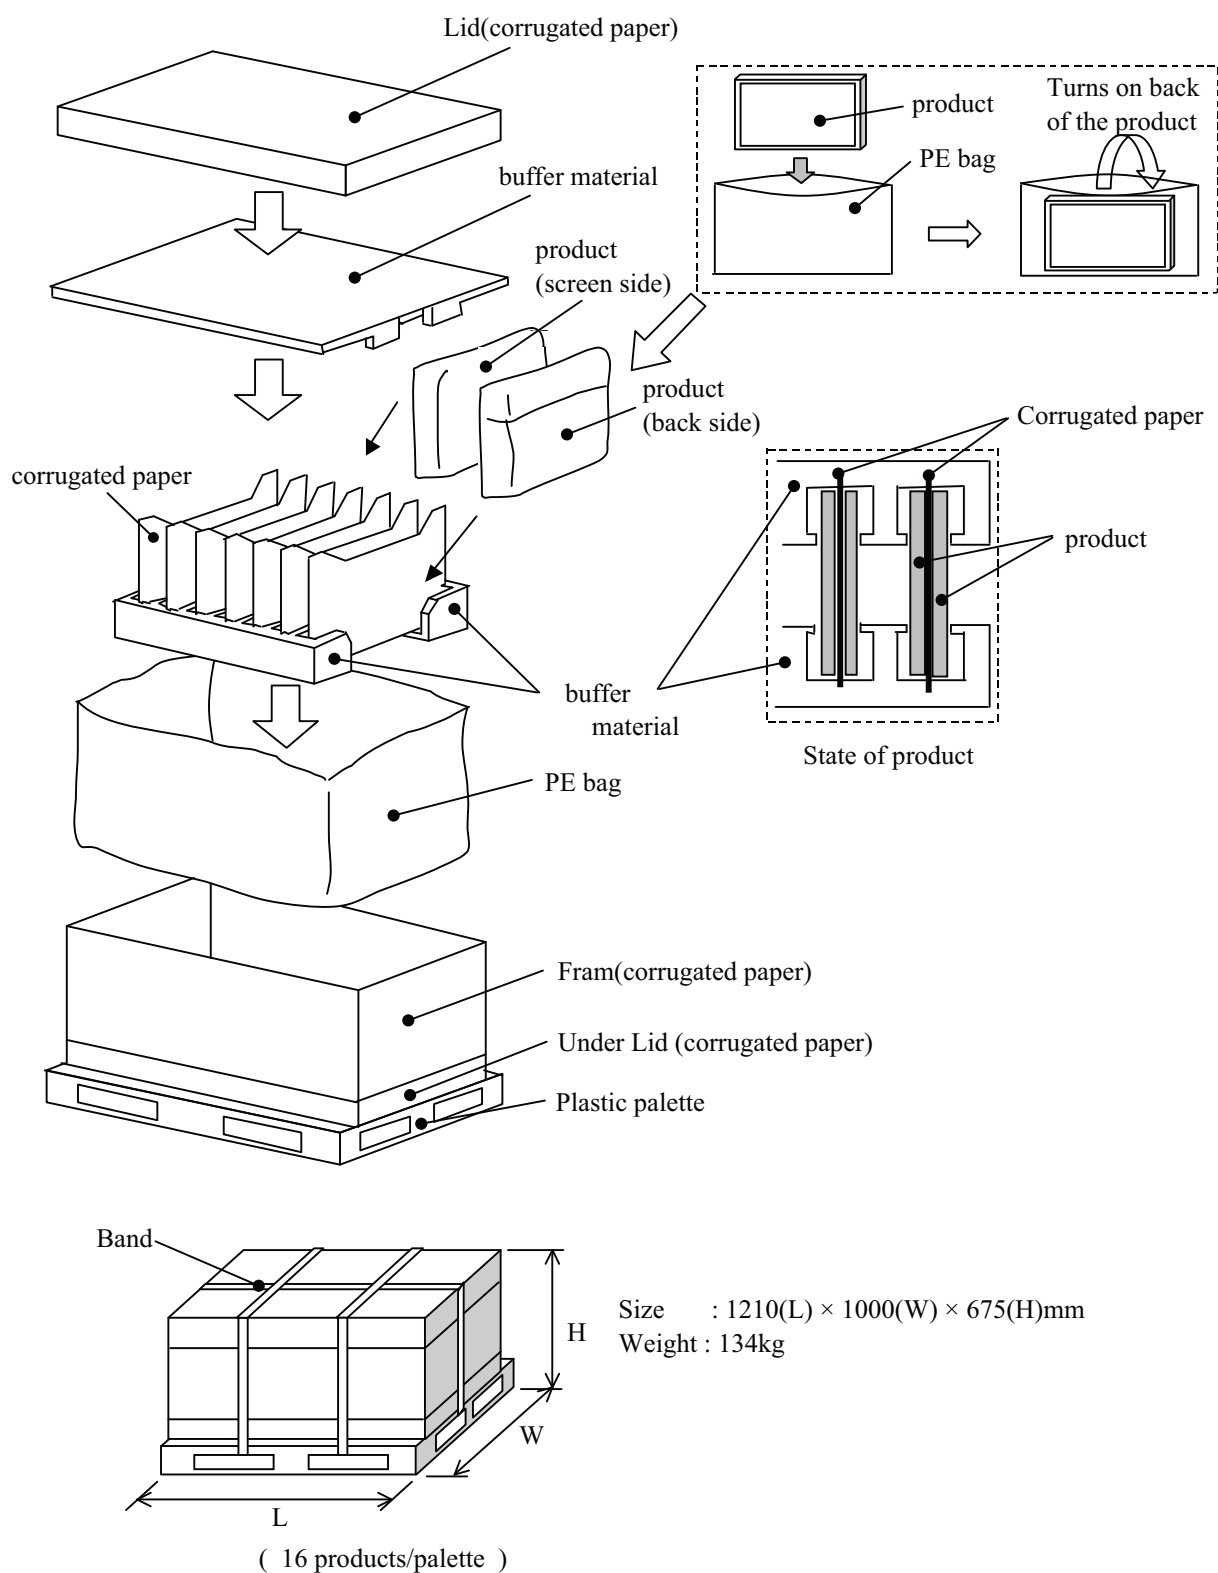

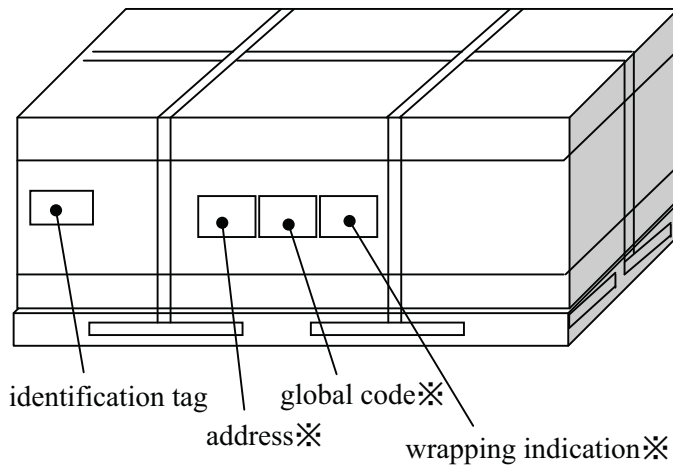

※Left and right are reversed occasionally.

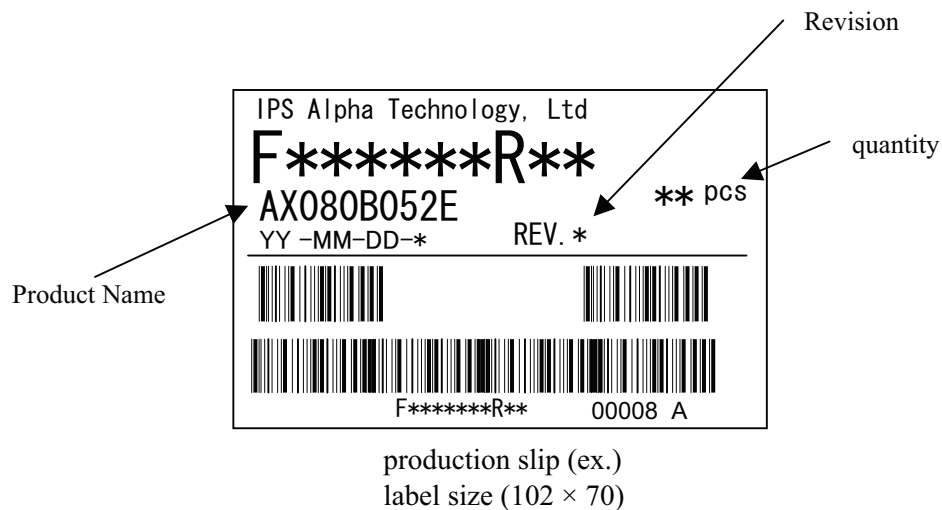

ご送付先	
品名 AX080B052E	
送案No	荷姿 ** ケ口
	

address (ex.)

L5EDD8Q00057

global code (ex.)

顧客名
品名 AX080B052E
出荷数 *** ケ
出荷日 YYYY-MM-DD

wrapping indication (ex.)



12. Reliability test

No.	Item	condition	Quantity	Period	
				determination	end
1	Low Temperature / Operating	Ta=0℃	3	500h	1000h
2	High Temperature / Operating	Ta=45℃	3	500h	1000h
3	High Temperature High Humidity / Operating	45℃ 95%RH	3	500h	1000h
4	Low Temperature / Strage	Ta=-30℃	3	500h	1000h
5	High Temperature / Strage	Ta=70℃	3	500h	1000h
6	High Temperature High Humidity / Strage	45℃ 95%RH	3	500h	1000h
7	Heat shock	-25/70℃ 30min./30min.	3	100cy.	200cy.
8	Heat shock test for solder	-35/85℃ 30min./30min.	3	200cy.	500cy.

Result Evaluation

Display function should be kept.